




Parameter	Value
Frequency Range	863-870 MHz
Gain	5 dBi
VSWR	≤ 2.0
Radiation Pattern	Omni
Impedance	50 Ω
Connector	N male
Dimensions	ø22 × 180 mm
Weight	81.5 g
Temperature	-40 °C to 85 °C

RADIATION PATTERN

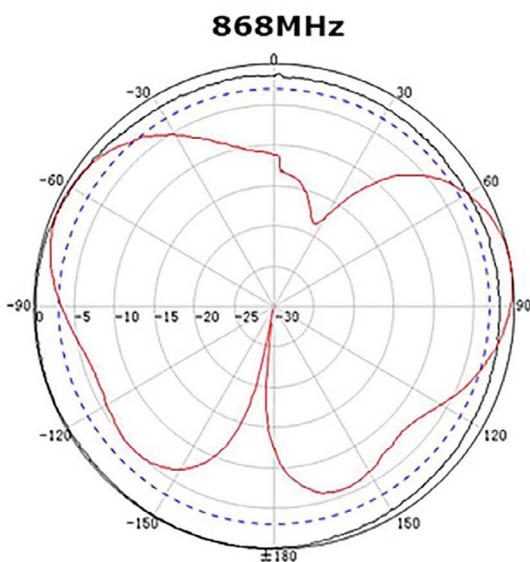

VSWR

